

Pulse Capacitor : STP-03 and STP-04 series

- medium Frequency range and higher r.m.s. Current
- is designed for 20~100kHz frequency

Application :

For Switching Power Supply input filtering, DC blocking and output filter, welding equipment application.

Construction :

- Axial type with Tin Plated Copper lead or Terminals : wrapped with flame retardant tape and epoxy ends seal
- Box type : Terminal lead / Electrical Lead Wire / Tin plated Copper Lead Wire
- Dipped type

Providing different connections and mounting options so as to increase your design flexibility

Properties :

Medium Frequency range and RMS Current Capacity; Low ESR, D.F. & dielectric loss; High Insulation Resistance; low Inductance; both AC and DC voltage; Flame Retardant Construction; Easy Installation

Electrical Connecting :

Large Terminals - to deliver larger discharge current I_{pp} and $I_{r.m.s.}$ when compare with traditional copper tin wires

Electrical Characteristic :

STP-03QI / STP-03QL / STP-03QT – higher RMS current

Rated Voltage : 100 ~ 400Vdc / 70 ~ 250Vac

STP-04QI / STP-04QL / STP-04QT – smaller size & higher voltage range

Rated Voltage : 250 ~ 700Vdc / 160 ~ 400Vac

Capacitance range : 1uF ~ 30uF

Capacitance Tolerance : $\pm 5\%$; $\pm 10\%$

Equivalent Series Resistance (ESR) : measured at 25C 100kHz

Dissipation factor (DF) : $< 0.1\%$ 1KHz) at 23C

Testing Voltage : $2 \times U_n$ 60sec 25C (can be customized design)

Insulation Resistance : Terminal – Terminal : 300,000M ohm 500Vdc 60sec

Terminal – Case : 5000M ohm 500Vdc 60sec

Operate Temperature : -25~105C



Full rated voltage at 85C, derate linearly to 50% rated voltage at 105C.

Pulse Voltage rise & fall time dV/dt : detail information available on request

Options :

Thermocouple can be build-in :

- capacitor internal temperature can be measured
- output temperature signal can be used as one of reference signals in the circuit and trigger other function

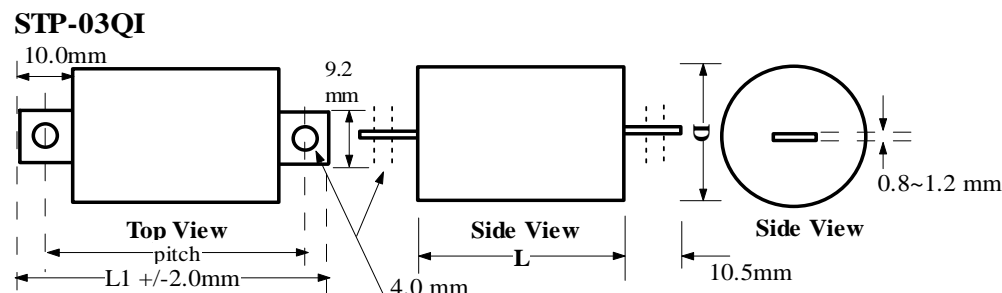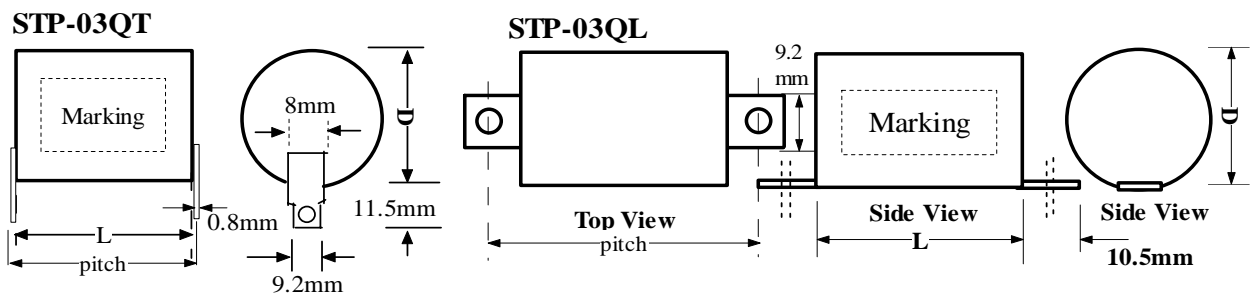

Dimension Tolerance : ± 1 mm unless specify

Pulse Capacitor - STP-03QI

Dimension and standard value : 100Vdc / 75Vac

Capacitance uF	Diameter D mm	Capacitor Length L mm	Total Length L1 mm	I rms A							Peak Pulse Current A	Max. dv/dt V/us	Max. ESR @ 100KHz mohm 90C
				+25C	+45C	+55C	+65C	+75C	+85C	+90C			
1.0 uF	15	29	48	11	9.9	8.9	8.0	6.5	5.2	4.4	22	22	15
2.0 uF	18	31	50	12.5	11.3	10.1	9	7.2	6.4	5.5	38	19	12
2.2 uF	20	31	50	13	11.7	10.5	9.3	7.4	6.6	5.6	41	19	12
3.0 uF	21	36	55	13.5	12.2	10.9	9.8	8.8	7.7	6.5	45	15	11
3.3 uF	22.5	36	55	14	12.4	11.2	10.2	9.0	7.9	6.7	49.5	15	11
5.0 uF	25.5	36	55	15.5	13.1	11.8	10.6	9.6	8.6	7.5	75	15	10
10.0 uF	26.5	40	59	18	15.3	13.7	12.3	11.2	10.0	8.5	100	10	9
20.0 uF	33	50	69	23	19.5	17.5	15.8	14.2	12.8	11	140	7	8
30.0 uF	39	50	69	25	21.2	19.1	17.2	15.4	13.9	12.2	210	7	6

Dimension and standard value : 200Vdc / 140Vac

Capacitance uF	Diameter D mm	Capacitor Length L mm	Total Length L1 mm	I rms A							Peak Pulse Current A	Max. dv/dt V/us	Max. ESR @ 100KHz mohm 90C
				+25C	+45C	+55C	+65C	+75C	+85C	+90C			
1.0 uF	18	31	50	8	8	8	8	8	6.8	5.4	15	15	20
2.0 uF	21.5	36	55	14.5	12.3	11	9.9	9	8.1	7.2	22	11	15
2.2 uF	22.5	36	55	15	12.7	11.5	10.3	9.2	8.3	7.3	24.2	11	15
3.0 uF	26	36	55	16	13.6	12.2	11	9.9	8.9	7.5	33	11	13
3.3 uF	27	36	55	16.5	14.8	13.3	12	10.8	9.6	7.7	36.3	11	13
5.0 uF	33	36	55	19	16.2	14.5	13	11	10	8.5	55	11	11
10.0 uF	37.5	48	67	22.5	19	17	15.5	13.9	12.5	10.6	100	10	9
20.0 uF	44.5	63	84	28	23.8	21	18.9	16	14.5	13	140	7	6

Dimension and standard value : 400Vdc / 270Vac

Capacitance uF	Diameter D mm	Capacitor Length L mm	Total Length L1 mm	I rms A							Peak Pulse Current A	Max. dv/dt V/us	Max. ESR @ 100KHz mohm 90C
				+25C	+45C	+55C	+65C	+75C	+85C	+90C			
1.0 uF	19.5	36	55	9.5	9.5	9.5	9.5	8.3	7.5	6.7	20	20	18
2.0 uF	22	48	67	15	15	15	14.2	12.4	10.5	8.5	32	16	15
2.2 uF	22.5	48	67	15.5	15.5	15.5	14.7	12.9	11	9.0	35	16	15
3.0 uF	26	48	67	21	17.8	16	15.2	13.7	11.6	9.6	48	16	11
3.3 uF	27	48	67	21.5	18	16.4	15	13.8	12.4	9.8	52	16	11
5.0 uF	28	63	84	24.4	20.7	18.6	16.7	15	13.5	11.5	55	11	8
10.0 uF	40	63	84	30	25.5	22.9	20.5	18.5	16.6	14.5	110	11	6

For other Capacitance, Voltage, r.m.s. Current and Peak Pulse Current not listed, please contact us for details.

Pulse Capacitor - STP-04QI

Dimension and standard value : 250Vdc / 160Vac

Capacitance uF	Diameter D mm	Capacitor Length L mm	Total Length L1 mm	Max. ESR @ 100KHz mohm	Max. dv/dt V/us	Peak Current A	Irms 70C 100kHz A
1	11.5	20	41	2.4	99	99	5.4
1.5	10.5	32	53	4.9	55	82.5	7.1
2.2	11.5	32	53	3.3	55	121	9.1
2.5	12.5	32	53	3	55	138	9.1
3	14	32	53	2.6	55	165	9.1
5	17.5	32	53	1.9	55	275	9.7
6.8	20.5	32	53	1.6	55	374	9.7
10	20.5	43	64	1.9	33	330	9.7
15	25	43	64	1.4	33	495	13.2
20	28.5	43	64	1.3	33	660	13.2
25	32	43	64	1.3	33	825	13.2
30	30	56	77	2.3	22	660	13.2

Dimension and standard value : 400Vdc / 250Vac

Capacitance uF	Diameter D mm	Capacitor Length L mm	Total Length L1 mm	Max. ESR @ 100KHz mohm	Max. dv/dt V/us	Peak Current A	Irms 70C 100kHz A
0.68	10.5	32	53	6.7	77	53	6.1
1	12.5	32	53	4.6	77	77	8.1
1.5	15	32	53	3.2	77	116	9.1
2	17	32	53	2.6	77	154	9.7
2.2	18	32	53	2.5	77	169	9.7
2.5	19	32	53	2.3	77	193	9.7
3	20.5	32	53	2.1	77	231	9.7
4	20	43	64	2.7	55	220	9.7
4.7	21.5	43	64	2.4	55	259	10.8
5	22	43	64	2.3	55	275	10.8
6.8	25.5	43	64	1.9	55	374	13.2
10	30.5	43	64	1.6	55	550	13.2
15	32.5	56	77	2.8	33	495	13.2

Dimension and standard value : 600Vdc / 330Vac

Capacitance uF	Diameter D mm	Capacitor Length L mm	Total Length L1 mm	Max. ESR @ 100KHz mohm	Max. dv/dt V/us	Peak Current A	Irms 70C 100kHz A
1	16	32	53	3.8	110	110	9.7
2	19	43	64	3.7	83	166	9.7
2.2	20	43	64	3.5	83	183	9.7
3	23	43	64	2.8	83	249	10.8
4.7	28	43	64	2.1	83	390	13.2
5	29	43	64	2	83	415	13.2
6.8	29	56	77	4.1	55	374	13.2
10	35	56	77	3.2	55	550	13.2

Dimension and standard value : 700Vdc / 400Vac

Capacitance uF	Diameter D mm	Capacitor Length L mm	Total Length L1 mm	Max. ESR @ 100KHz mohm	Max. dv/dt V/us	Peak Current A	Irms 70C 100kHz A
0.68	17.5	32	53	4.1	138	94	9.7
1	21	32	53	3.1	138	138	10.8
1.5	21	43	64	3.8	99	149	10.8
2	24	43	64	3	99	198	13.2
2.2	25	43	64	2.8	99	218	13.2
3	29	43	64	2.3	99	297	13.2
4	33.5	43	64	2	99	396	13.2
4.7	30	56	77	4.7	66	310	13.2
5	31	56	77	4.4	66	330	13.2